


# Flapper Solenoid

MF2228



- Variable Stroke
- Alternative Armatures
- Alternative Terminations
- Optional Plating Finish
- Anti-impact Available
- High Performance over Short Stroke
- Compact Low Profile Design
- Low Residual Magnetic Properties
- Integral Spring
- 28mm x 22mm x 30 mm
- 100% power 4.0 Watts dc
- 4mm stroke

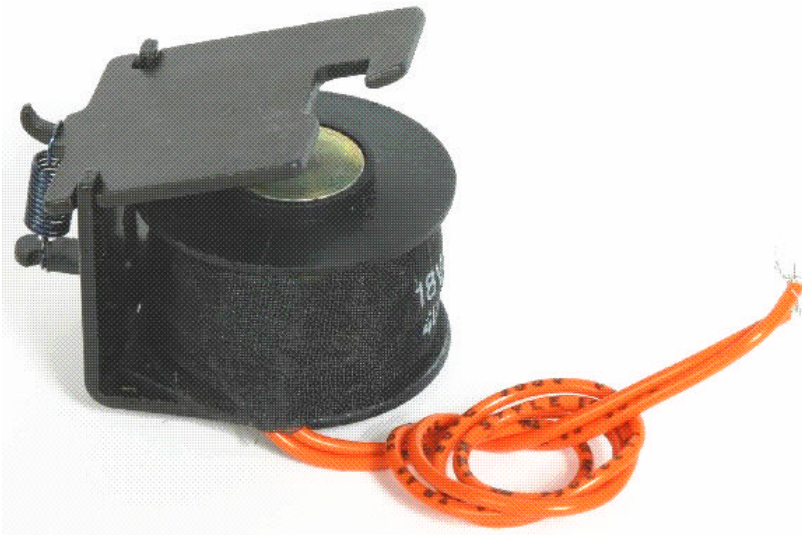